


M485-DI8AC-I

8 digital inputs to DC and AC. RS485 bus. 10 - 30VDC FEATURES

RS485 Module - Slave, with digital input
8 x digital inputs for DC and AC
Voltage monitoring
input voltage: 80 - 250VAC / DC
Supply: 10 -30vdc

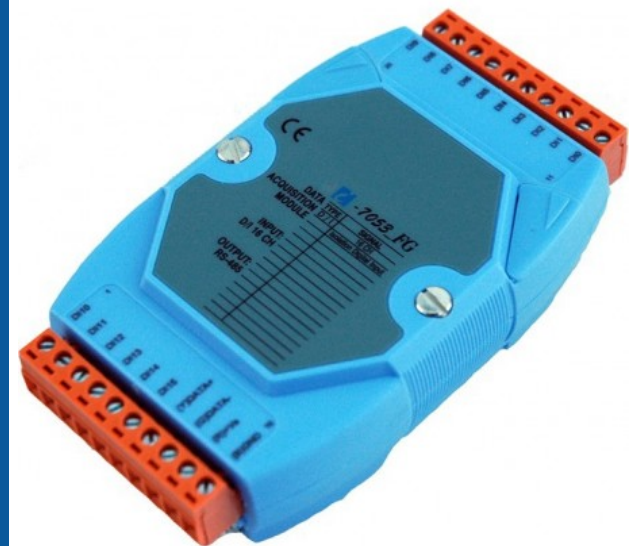

Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.



Svensk Binär Teknik

M485-DI8AC-I

SPECIFICATIONS

Forsyning	:	10 - 30 VDC, 0,8 W via klemrække
Indgang	:	8 individuelt isolerede kanaler. Logisk 0: 0 - 30 V Logisk 1: 80 - 250 V
Isolation	:	3750 VRMS
Tæller	:	1 stk. 16 bit tæller maks. frekvens 100 Hz Logisk 0: 0 - 30 V Logisk 1: 80 - 250 V



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.