


M485-DIO4-I

4 opto-isolated digital inputs and 8 digital outputs,
open collector, RS485. 10 - 30VDC

FEATURES

- 8 digital outputs and 4 digital inputs
- Open Collector Output
- Photocouple Isolation
- Digital input channels can be used as 16-bit counters
- Configurable Power-on Value settings
- Configurable settings for sure value
- 3750 Vrms insulation voltage
- Dual Watchdog
- Wide operating temperature range: -25 to + 75 ° C

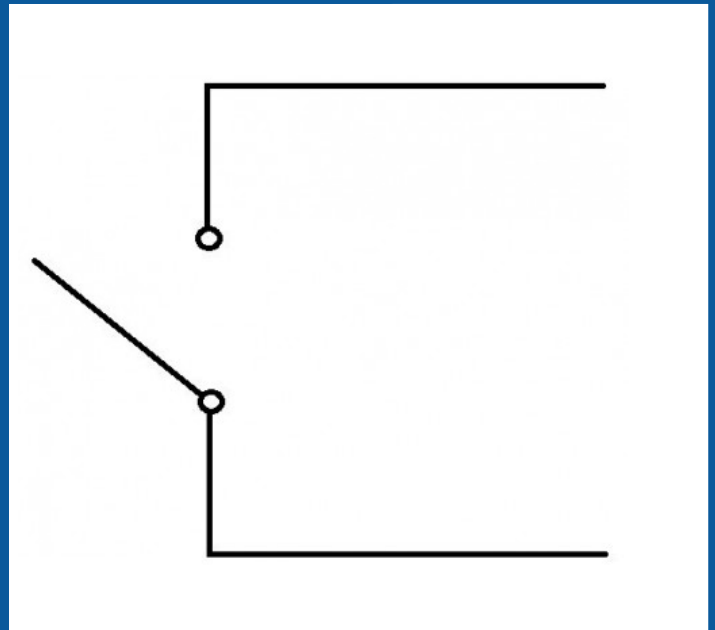



Svensk Binär Teknik

M485-DIO4-I

SPECIFICATIONS

Indgang	:	4 stk. isolerede med fælles plus. Logisk 0: 0 - 1 V Logisk 1: 4 - 30 V
Isolation	:	3000 VRMS
Udange	:	8 stk. optoisoleret med fælles stel "Open collector": 30 V/375 mA



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.