


ADLINK's PCI-7433. 64 kanalers isolerede digitale indgange, PCI

FEATURES

- Supports a 32-bit 5 V PCI bus
- 64-CH isolated digital inputs
- 2500 VRMS optical isolation
- Sink current up to 500 mA on each isolated output



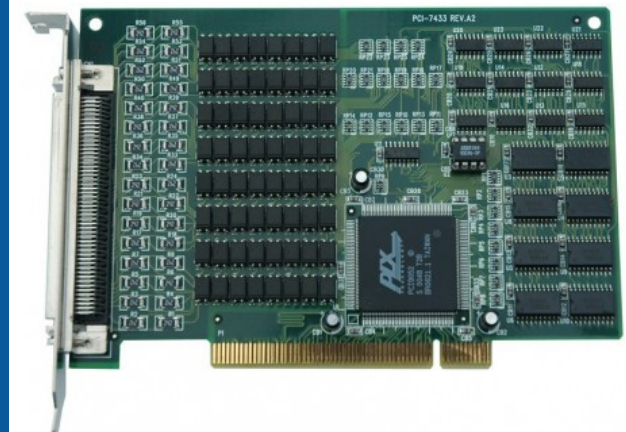

Svensk Binär Teknik

OPTI64PCI

SPECIFICATIONS

Indgang	:	64 stk. Logisk 0 fra 0 - 2,4 V Logisk 1 fra 4 - 24V maks. 10 kHz fælles stel
Indgangsimpedans	:	2,4 k Ω
Software	:	Drivere til Windows 2000, XP, Win7 og Win8 Labview og Linux medfølger
Stik	:	DB100 hun
Dimensioner	:	93 x 137 mm



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.