


USB RFID reader for Mifare. 13,56MHz TAGs. Desktop,
Can be programmed for other formats

FEATURES

- Frequency: 13.56 MHz
- Can easily be programmed for other formats
- programmable HID or COM port
- Can program sectors in TAG
- RF Protocol: ISO14443A, MIFARE
- Built-in antenna
- supply: USB 5V / 200mA
- Operating temp. -20 to + 70 ° C
- Play
- Plug Dimensions: 105 x 72 x 16 mm |



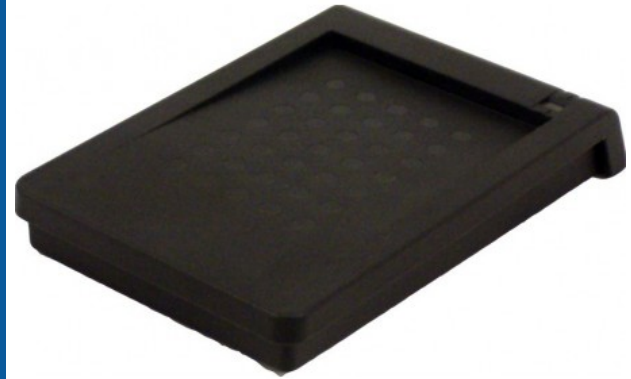

SPECIFICATIONS

Operating Temp.	:	-20 til +70 °C
Andet	:	Software medfølger, med 1 m. USB kabel, magneter i bagpladen
Forsyning	:	5V DC 500mA, USB til PC
Interface	:	USB tilslutning, med mulighed for HID*) (tastatur) emulering
Mål og vægt	:	16 x 72 x 105 mm - 95 g
Rækkevidde	:	up to 5 cm
Tag-typer	:	Mifare 1k og 4k Mifare Ultralight
Udformning	:	Bordmodel

