

TERM25R8OPTI8

Terminal board with 8 x terminal relay 250VAC / 6A and 8 x opto-insulated inputs, DB25 male FEATURES


Active Terminal Cards

Input Levels: Logical 0: 0-0.8, Logical 1: 5 - 30 V

8 End Phrases 250 VAC 6 A

DB25 Male

30 x 100 x 160 mm

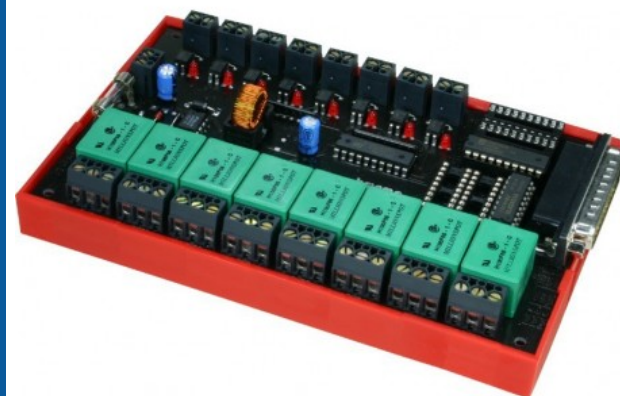

Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk



TERM25R8OPTI8

SPECIFICATIONS

Forsyning	:	+5 volt
Indgang	:	Indgangsniveauer: Logisk 0: 0-0,8, Logisk 1: 5 - 30 V
Indikatorer og kontakter	:	8 lysdioder viser inputstatus og 8 viser relæernes status
Isolation	:	2500 VDC
Stik	:	DB25 han
Udgange	:	8 slutterelæer 250 VAC 6 A
Dimensioner	:	30 x 100 x 160 mm

