

Convert from Composite Video (BNC), VGA, DVI and HDMI to HD-SDI, 3G-SDI


FEATURES

Multi format Video format Convert to SDI
 Video In: HDMI, DVI, VGA and Composite Video (BNC / RCA)
 2 x SDI output simultaneously
 SDI output up to 100 meters at 3G- SDI or 200 meters at HD-SDI
 Scales input signal for HD-SDI or 3G-SDI
 HD input: VGA @ 60Hz ~ SXGA @ 60Hz 480i ~ 1080p @ 60Hz
 VGA / DVI Input Timing: VGA @ 60Hz ~ 1920 x 1080 @ 60Hz.
 Composite video input: NTSC, Pal, Secam
 Supports black screen Signal output.
 12VDC / 2.5A Power supply included
 Size: 288 x 110 x 32 mm

Front panel



Rear panel

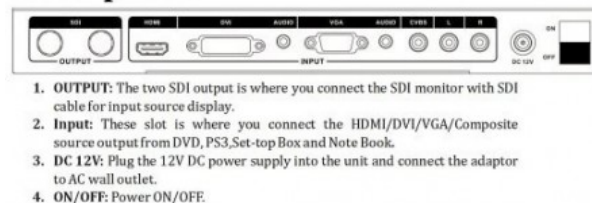

1. **OUTPUT:** The two SDI output is where you connect the SDI monitor with SDI cable for input source display.
2. **Input:** These slot is where you connect the HDMI/DVI/VGA/Composite source output from DVD, PS3, Set-top Box and Note Book.
3. **DC 12V:** Plug the 12V DC power supply into the unit and connect the adaptor to AC wall outlet.
4. **ON/OFF:** Power ON/OFF.





Svensk Binär Teknik

CNV-SDI-MULTI

SPECIFICATIONS

Operating Temp.	:	0°C ~ 40°C / 32°F ~ 104°F
Input	:	12V
Strømforbrug	:	5W
Weight	:	866g



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.