


19 "SXGA IP66 / IP69K Stainless Steel Panel PC I3-6100U CPU 32G MLC SSD, Projected Touch FEATURES

19 "TFT-LCD 1280x1024
Projected Capacitive Touch.
Intel 6th Core I3-6100U 2.3GHz (Option I5 3.0 GHz CPU)
Max. 16GB RAM DDR4
Flat Front Bezel
Grade 304 Stainless steel cabinet (Grade 316 for option).
IP66 / IP69K RATED with M12 connector.
Option: RFID
Press the power button on the side edge of
Hygienic Cleaning.
OS Support: Windows Embedded 7 / 8.1, Windows 10 IoT Ent Ltsb
9 ~ 36v DC Power Input

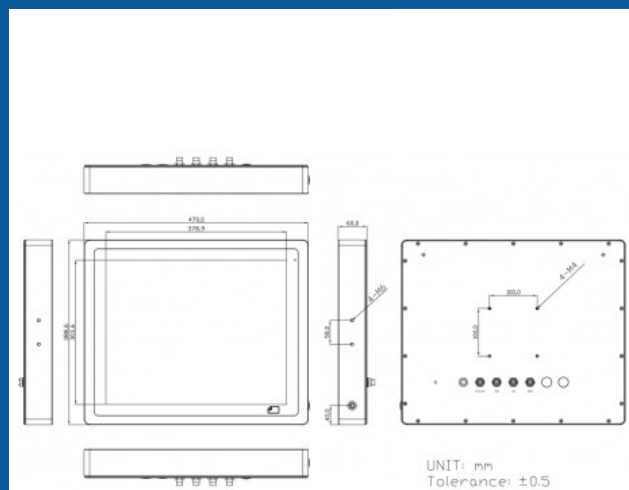

SPECIFICATIONS

USB	:	USB 1 x M12 8-pin for 2 x USB 2.0 with waterproof cover and chain
Operating Temp.	:	0~50°C
Approval	:	Certification CE / FCC CLASS A
Ethernet	:	10/100/1000MBit LAN 1 x M12 8-pin for LAN with waterproof cover and chain
Hukommelse	:	1 x SO-DIMM DDR4 max. 16GB RAM (no RAM installed)
IP-Tæthed	:	IP rating IP66 / IP69K
Luftfugtighed	:	10 to 90% @ 40°C, non- condensing
Msata	:	1 x Msata onboard
Opløsning	:	Max. resolution 1280 x 1024
Porte	:	Serial 1 x M12 8-pin COM1, RS-232/422/485, default RS-232, with waterproof cover and chain
Strømforbrug	:	30W
Strømforsyning	:	DC 9~36V Power 1 x M12 3-pin for DC power with waterproof cover and chain





Svensk Binär Teknik

IPP19I3

SPECIFICATIONS

Touch	:	Standard Projected Capacitiv Touch Light transmission 80%, (Oprion; resistiv, protection glass)
Weight	:	9.5Kg
Dimensioner	:	470 x 388.6 x 60 mm



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.