


RFID reader Mifare and QR code. 13.56MHz, Wiegand 34 interface. Wall mounted. Indoors. 12vdc. FEATURES

- RFID with QR code reader
- 125kHz EM400x
- 13,56MHz Mifare Ultralight
- Built-in buzzer for audio notification
- can read multiple formats
- With CPU watchdog
- Power supply: 12V DC
- Output: RS232, RS485, Wiegand 26/34 bits



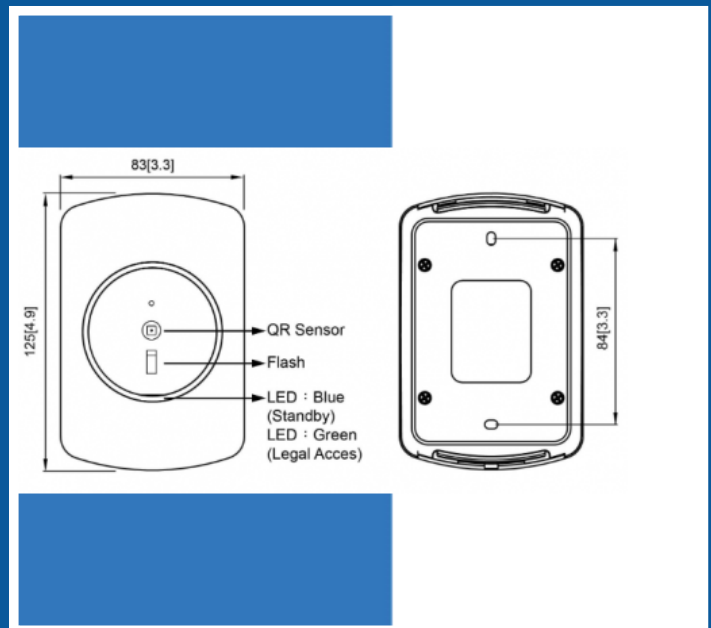

Svensk Binär Teknik

RFID-MR-QR

SPECIFICATIONS

Interface	:	Wiegand 26/34bit
RFID	:	13.56MHz Mifare,



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.