


12VDC / 3A (36Watt) DC-DC converter from 8-40VDC.
In molded aluprofile. IP68. Not galvanic isolated
FEATURES

INPUT 8-40VDC
OUTPUT 12VDC 3A
Operating temperature -30 ° C to + 80 ° C
not isolated between input and output.
IP68
Overvoltage protection
over -Current protection
over-temperature protection



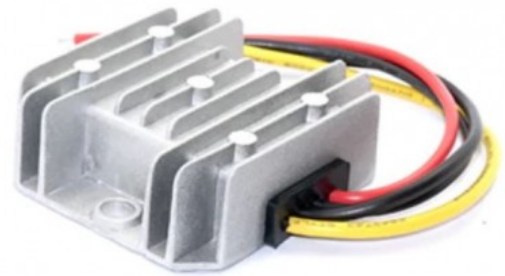

Svensk Binär Teknik

DC-DC12V3A

SPECIFICATIONS

Operating Temp.	:	-30°C to +80°C
Forsyning	:	8 - 40VDC
IP-Tæthed	:	IP68
Dimensioner	:	64mm x 57mm x 22mm



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.