


MON19-P-TU230V

19 "Panel LCD Monitor, IP65 front, resistive touch
(USB or RS232), 1280x1024, VGA, DVI-D, HDMI, AC
230V, 250 nits, 4: 3

FEATURES

19 "SXGA LCD monitor
Resolution: 1280 x 1024
4: 3 format
IP65 front
250 nits
1 x DVI-D
1 x VGA
1 x HDMI
1 x USB
resistive touch
Panel / wall / rack or VESA mounting
Dimensions: 482 x 55 x 380 mm
AC 230V supply screw-terminal
Weight: 6kg without packing / 7.5kg packed

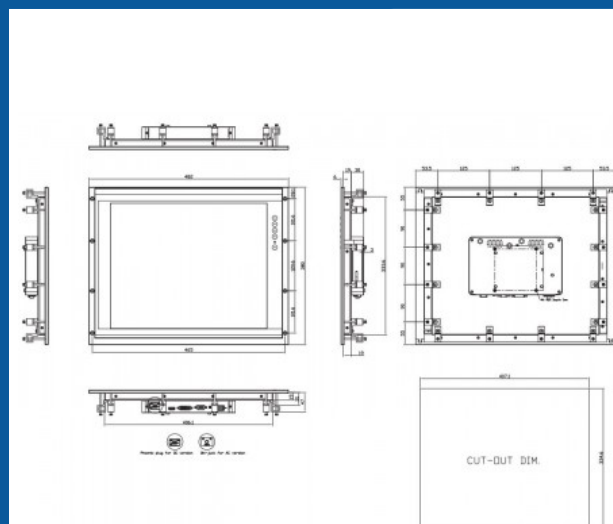

Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk



SPECIFICATIONS

Operating Temp.	:	0°C ~ +45°C (+32°F ~ +113°F)
Forsyning	:	
Grafik	:	VGA, HDMI, DVI-D
IP-Tæthed	:	IP65 front
Lysstyrke	:	250 nits
Mål og vægt	:	19" SXGA TFT LED
OSD	:	OSD (on screen display)
Strømforsyning	:	230Vac. max.power consumption 17 Watt
Tilbehør	:	1 x VGA cable 1 x USB cable for touchscreen 1 x Audio cable 1 x EU power cord
Touch	:	USB resistive touch (option RS232 on inquiry)
Weight	:	6 kg
Dimensioner	:	482 mm (W) x 55 mm (D) x 380 mm (H), Pakke dimensioner: 595 x 230 x 555 mm

