


REL5V2

2 channel relay print module for e.g. switching relays
COM/NO/NC, 5VDC supply voltage. Opto-isolated
input

FEATURES

Module with 2 relay outputs
5VDC from optically isolated digital input
GND (-), VCC (+), IN (digital input)
COM, NC, NO
Max load: AC 250V / 10A DC 30V / 10A - non-
inductive load!
holes for mounting
approx. size 51x39x19mm (l x W x H)
REMEMBER THE RIGHT CABLE FOR YOUR NAYAX
TERMINAL!

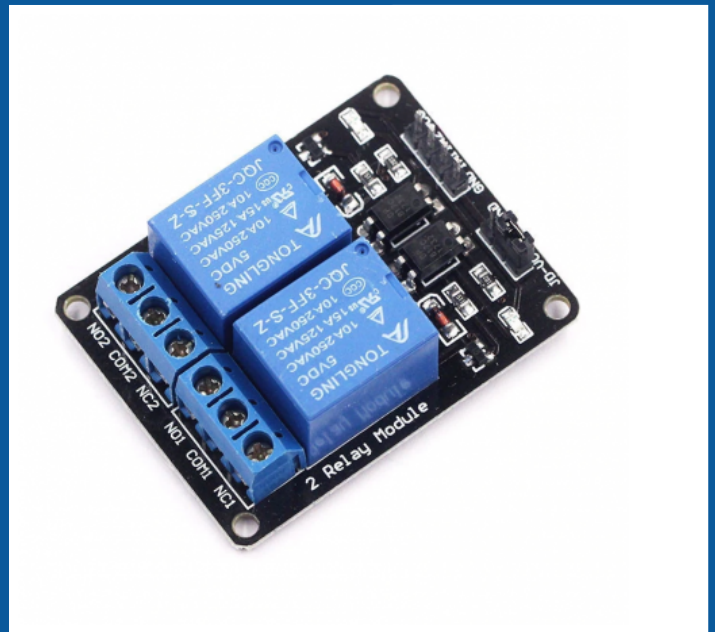



Svensk Binär Teknik

REL5V2

SPECIFICATIONS

Formfaktor	:	åben printmodul uden kabinet - til indbygning
Forsyning	:	5VDC fra PAY terminal eller separat (jumper)



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.