


15" TFT panel DVI-I with VGA, DisplayPort, HDMI,
1600 Nits for sunlight 1024x768, 12Vdc 4:3 - Open
frame

FEATURES

- 15" 1600nits Open Frame Monitor for installation.
- 15" TFT LCD, panel
- 15" sunlight readable, high brightness (1,600 nits)
- Resolution: 1024 x 768
- LED backlight
- High contrast ratio (1000:1)
- Wide temperature range (-20°C~70°C)
- 12VDC
- Low power consumption
- BL MTBF: 70,000 hours



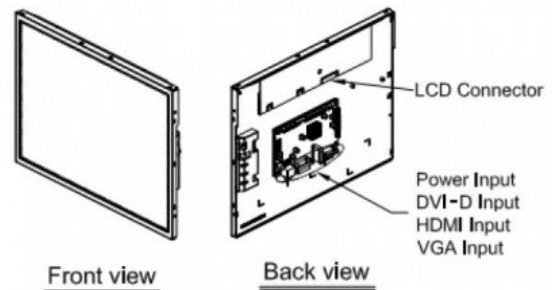

SPECIFICATIONS

Operating Temp.	:	-20°C ~ +70°C
Farve	:	Color saturation (NUCS) 69%
Antal farver	:	16.7M
Approval	:	CE, FCC
Forsyning	:	12VDC
Grafik	:	VGA, DVI-D
Lysstyrke	:	1600 cd/m2
Opløsning	:	1024x768
OSD	:	4 keys (Power switch, menu, +, -) OSD control Brightness, Color, Contrast, Auto Turing, H/V Position....etc
Pixels	:	pitch (mm) 0.297(H)x0.297(V). 85(PPI)
Skærm	:	15" TFT LED backlight 1024x768
Skærm	:	304.1(H) x 228.1 (V)





Svensk Binär Teknik

MON15-SUN+

SPECIFICATIONS

Weight : 1.2Kg



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.