


MON21.5T-IP66

21.5 "Full IP66 Close monitor with Projected Touch
VGA / HDMI input in stainless steel option 1000nits
for sunlight

FEATURES

- 21.5 "Stainless Steel Screen
- IP66 Near Standard 250 Nits (Available with 1000nits On Ordering)
- M12 Connector VGA / HDMI
- Speaker IP65 2W
- M12 Connecotrs
- Projected Capacitive Touch
- OSD on back
- Vesa Mount 100x100mm (Option Yoke Mounting)
- DC 9 ~ 36V
- 571x362x55mm

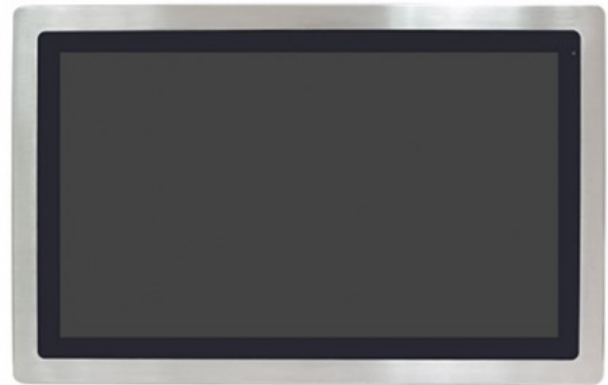

Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk



MON21.5T-IP66

SPECIFICATIONS

USB	:	Touch interface
Operating Temp.	:	0~50 degrees
Antal farver	:	16.7M
Approval	:	CE/FCC class A
Kontrast	:	250 cd/m2 OPTION 1000
Synsfelt	:	178Hx178V
Touch	:	Projected Touch OPTION! Capacitive, Resistive, Glass
Weight	:	9.5Kg
Dimensioner	:	571x362x55mm

