


4 x relay com, NO, NC. 30VDC, 250VAC 10A via USB,  
HID, 5VDC

## FEATURES

- Compact open board with 4 relay outputs  
250VAC / 30VDC / 10A resistive load only
- Controlled from USB via HID (E.g. [usb-relay-hid](#) )
- Supply voltage: 5VDC
- Supply via DC jack or terminal block
- No cabinet
- Please note no software is included
- Get info on USB-RELAY-HID software online.



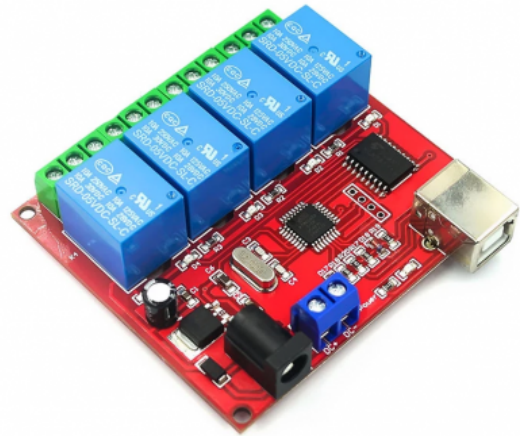

Svensk Binär Teknik

USB-REL5V4

## SPECIFICATIONS

|           |   |   |
|-----------|---|---|
| Drivere   | : | HID Driver                                  |
| Forsyning | : | 5VDC (Via DC-stik or terminal block)        |
| Software  | : | Not included. Compatible with usb-relay-hid |
| Stik      | : | USB-B Hun                                   |
| Udgange   | : | 4 skifterelæer 250 VAC 10 A                 |



Binär Teknik AB  
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.