


4 x relay com, NO, NC. 30VDC, 250VAC 10A via USB,
HID, 12VDC

FEATURES

- Compact open board with 4 relay outputs
- 250VAC / 30VDC / 10A resistive load only
- Controlled from USB via HID (E.g. [usb-relay-hid](#))
- Supply voltage: 12VDC
- Supply via DC jack or terminal block
- No cabinet
- Please note no software is included
- Get info on USB-RELAY-HID software online.



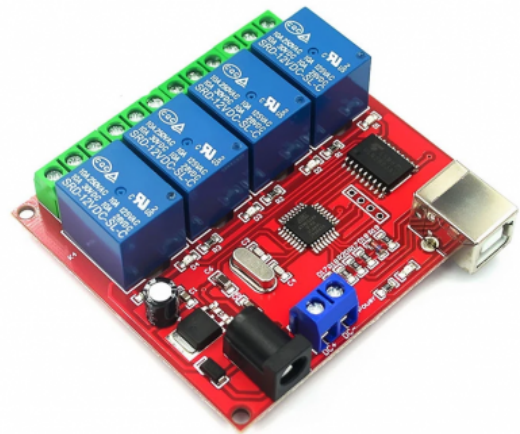

Svensk Binär Teknik

USB-REL12V4

SPECIFICATIONS

Drivere	:	HID Driver
Forsyning	:	12VDC (Via DC-stik or terminal block)
Software	:	Not included. Compatible with usb-relay-hid
Stik	:	USB-B Hun
Udgange	:	4 skifterelæer 250 VAC 10 A



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.