

IPP24IX-IP66

23.9" Panel PC IP66/IP69K Closed steel cabinet with M12 Connection, I3 or I5 CPU, VESA, Yoke mounting, RS232/422/485,

FEATURES

23.9" Stainless Steel Panel PC

8th Gen Core i5-8365UE 1.6GHz, or Core

i3-8145UE 2.2 Ghz

1 x 260 SO-DIMM DDR4 2400MHz max. 32GB RAM

TPM 2.0

1 x M12 Ethernet

1 x M12 RS232/422/485 default 232

1 x M12 USB 2.0

1 x 2½" SATA3 SSD (opt)

1 x M.2; M-key (PCIe x4/SATA3 Auto detect),

Support 2242 default

RFID mpdul design for fron as OPT. (need to be ordered)

1 x Mini PCIe for 4G/5G. Wifi/BT

1 x Nano sim socket

easy to clean Design

Grade 304 Stainless Steel Enclosure

(Option 316 can be ordered special)

IP66/IP69K IP

M12 Connectors

Standard 250 nits, (High Brightness on request

1000 nits)

Resolution 1920 x 1080

Can be ordered with Resistive Touch, Projected Capacitive Touch, and Glass (Specified when

ordered)

Touch on/off Button on the Side Edge for Hygienic

Cleaning

Special order can be with 2 x M12 spare for (2x


USB2.0 or 1 x USB 3.0 or 1 x LAN or 1 x COM)

Vesamount

YOKE-Mount as opt.

DC 9~36Vdc

OS support: WIN 10 / WIN 11

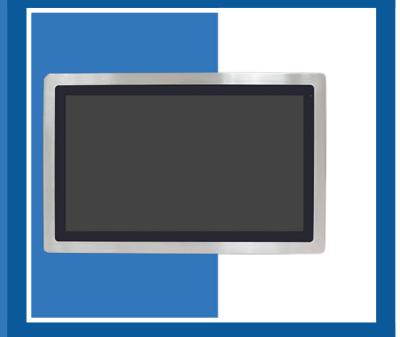



IPP24IX-IP66

SPECIFICATIONS	
USB	M12 8-pin for USB 2.0 with waterproof cover and chain
Operating Temp.	0~50°C
Hukommelse	260-pin SO-DIMM up to 16GB DDR4 2133MHz
Input	M12 3-pin for DC power with waterproof cover and chain
Lysstyrke	250(1000 option)
Montering	VESA mount 200 x 100, Yoke mount for optional
Netværk	M12 8-pin for LAN with waterproof cover and chain
Opløsning	1920 x 1080
Porte	M12 8-pin COM1, RS-232/422/485, default RS-232, with waterproof cover and chain
Skærm	23.8"
Touch	Projected capacitive touch, touch on/off button at the side
Dimensioner	656 x 423 x 53 mm

