




Svensk Binär Teknik

MON12-TFT-T-IP66

12.1" TFT display 360 Degrees IP66 tight, VGA, HDMI, 304 Steel enclosure option with 1000 nits for sunlight FEATURES

12.1" Stainless Steel Display
standard 450/500 nits OPTION: 1000nits
Option: Optical Bonding for UV protection
True Flat Front Bezel Design and Grade 304
Stainless Steel Enclosure
(Grade 316 for Option)
IP66/IP69K Rated with M12 Connectors
Option! Resistive Touch, Projected Capacitive
Touch, and Glass
Touch Interface USB
Touch on/off Button on the Side Edge for Hygienic
Cleaning
VESA mount 75x75, OPTION: Yoke mount
0~50°C / -20~60°C (option)
Power input 9~36Vdc (1xM12 3-pin Connector)
8W/12W (high nits display)
Size 335x365x53mm

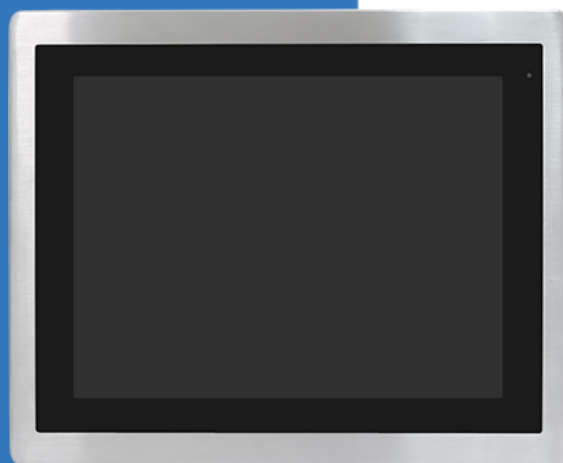

Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.



SPECIFICATIONS

Operating Temp.	:	0~50°C / -20~60°C (option)
Antal farver	:	from standard 262k/16.2M
Approval	:	CE/FCC class A
Betragningsvinkel	:	depends of display! 178(H)x178(H), 160(H)x140(V)
Effekt	:	Depens on TFT selection max 12W
Forsyning	:	9~36VDC
Grafik	:	VGA, HDMI
IP-Tæthed	:	IP66/ip68K
LCD	:	12.1" 800x600
Lyd	:	1x2W IP65 speaker (option)
Opløsning	:	Standard 800x600 Option! 1024x768
OSD	:	on rear side





Svensk Binär Teknik

MON12-TFT-T-IP66

SPECIFICATIONS

Touch	:	USB, Select between Resistive, Projected, Glass
VESA standard	:	VESA 75x75
Weight	:	4.6Kg
Dimensioner	:	335x265x53mm



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.