VTL100059
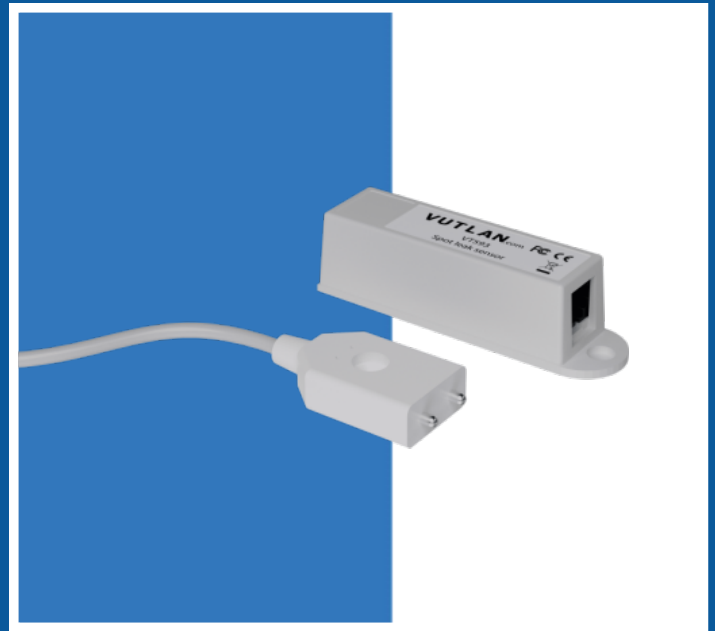
Spot leakage and liquid level sensor

FEATURES

Leak detection for conductive liquids
Level monitoring in containers, pits, cellars
Two stainless steel rods
Encased in plastic
Suitable for plumbing, trays, raised floors
Can be used near toilets, basements, washing machines, water heaters
Two RJ connectors for system integration
Dimensions 60×18×18 mm
Operating temperature -10 °C to +80 °C

Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden

042 14 10 85

salg@danbit.dk

SPECIFICATIONS

Input	:	2 wire (WDC cable)
Luftfugtighed	:	5% to 95% (non-condensing)
Maks. afstand	:	100 m
Output	:	RJ11 / RJ12 (6p4c)
power consumption	:	60mW
Weight	:	60 g
Dimensioner	:	60×18×18 mm