


DC-DC48V-1224-8A

48VDC 8A DC-DC from 10 - 30VDC 384Watt, Step-up
buck. Not galvanically isolated

FEATURES

- Input voltage: 10 - 30VDC
- Output voltage: 48VDC
- Max current: 8 Amp
- Overvoltage, over-current protection
- Waterproof, dustproof
- Voltage regulation: <1%
- Ripple: 180mVp-p
- Switch frequency: 50kHz
- Efficiency: 95%
- Dimensions: 100 x 80 x 39 mm
- Flange mounting
- Weight: 550g
- Temperature range: -40 to + 80°C
- Cable length: 16cm

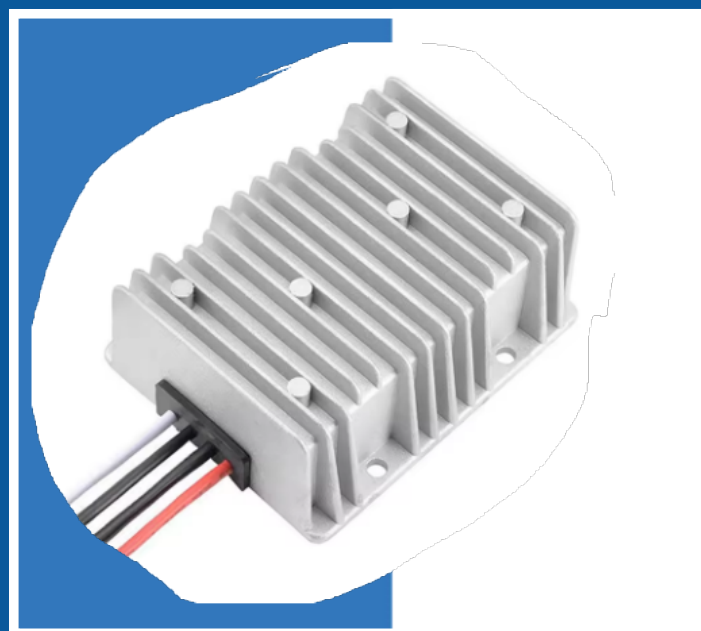

Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk