


Adlink PCI-7256. 16 kanalers isolerede digitale input, 16 kanalers latching relæ output, PCI FEATURES

- Reläerna behålla sin ställning trots att strömmen till kortet är bortkopplad.
- Supports a 32-bit 3.3 V or 5 V PCI bus
- 16-CH latching SPDT relay outputs
- Power saving on relay actuation
- Output status unchanged when power-off
- On-board LED indicators for relay status
- 16-CH isolated DI
- Change-of-status (COS) interrupt
- Board ID



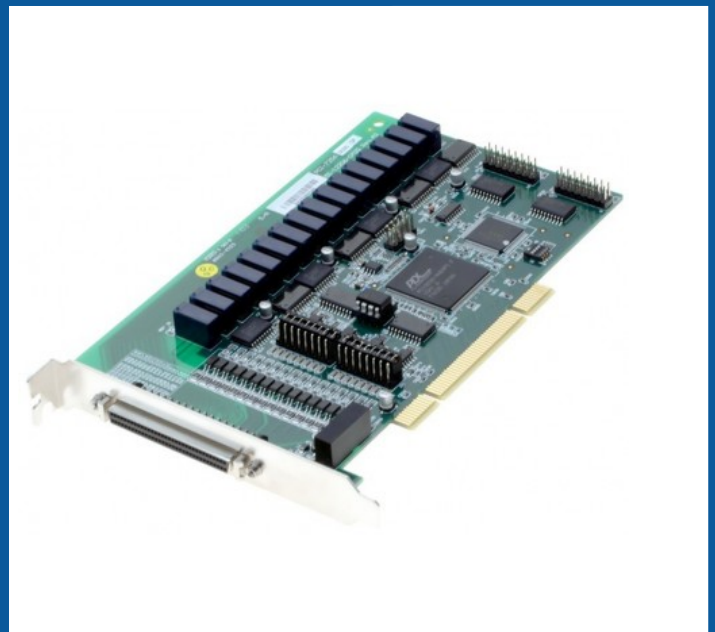

REL16OPT16PCI

SPECIFICATIONS

Indgang	:	8 optoislerede (PC-3H4), fælles stel (minus) Logisk 0: 0 - 2 VDC Logisk 1: 5 - 24 VDC ndgangs niveau: ikke polariseret
Indgangsimpedans	:	4,7 KΩ
Isolation	:	2.500 VDC
Software	:	Drivere til DOS, Windows 2000, XP, Win7 og Win8 samt Labview og Linux medfølger
Stik	:	DB68MM hun
Udgange	:	16 skifterelæer ("klæbe-relæer") Belastning: 250 VAC 5 A eller 30 VDC 1 A Skiftetid: typisk 3 ms

