


8 x relä COM, NO, NC. 24VDC, 250VAC 10A via USB,
HID

FEATURES

- Kompakt öppen bräda med 8 reläutgångar
- 250V / 10a Endast resistiv belastning
- kontrollerad från USB
- Spänning: 5VDC
- leverans via DC-uttag eller terminalblock
- ingen skåp



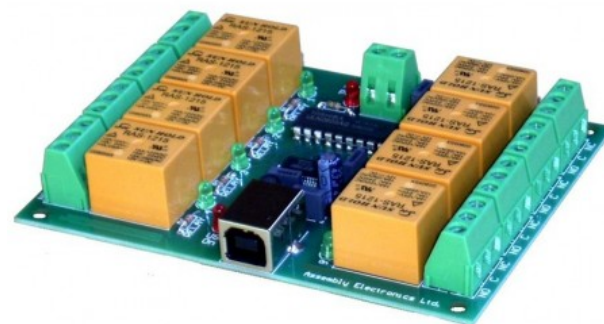

SPECIFICATIONS

Forsyning	:	5VDC
Indikatorer og kontakter	:	8 lysdioder viser relæernes status
Software	:	USB driver til Windows 2000,XP, Vista, Win7 og Win8 samt Programmeringseksempler i Visual C++, Borland C++ Builder samt Visual Basic medfølger
Stik	:	USB type B samt skrueterminal
Udgange	:	8 skifterelæer 250 VAC 10 A
Dimensioner	:	16 x 106 x 78 mm

