


Intelligent CANBUS 2.0A och 2.0B till 10/100 Base- TX Ethernet / Modbus TCP/IP / Modbus RTU omvandlare FEATURES

- Intelligent CAN för Modbus TCP/IP Converter
- Stödjer specifikation CAN 2.0A och 2.0B
- Maximal överföringshastighet upp till 1M BPS för CAN och 115,2 Kbps för RS-232 RS-485
- Maximal överföring Avstånd på CAN Över 1000m (Följ CAN-specifikationen)
- 7-segment LED-display för modul IP, RS-232 Baudhastighet, kan konfigurera ...
- Stödjer webbkonfiguration
- Stödjer max 24 Ethernet-klienteranslutning
- MODBUS TCP / RTU-kommando för läsning och skrivning av CAN meddelande
- Transparent kommunikation mellan CAN-enheterna via Ethernet
- 30 Specifika CAN ID i Modbus TCP / RTU läge
- DIN montering

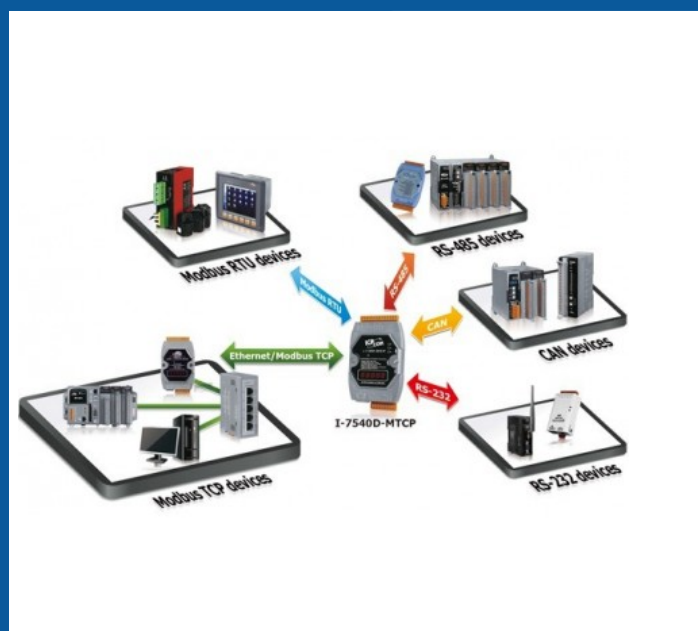

SPECIFICATIONS

Driftstemperatur	:	-25 ~ 75 °C
Övrig	:	Terminator Resistor Jumper for 120 Ω terminator resistor Specification ISO-11898-2, CAN 2.0A and CAN 2.0B
Ethernet	:	10/100Base-TX Ethernet Controller (Auto-negotiating, Auto_MDIX) Connector RJ-45 with LED indicator
Forsyning	:	Unregulated +10 ~ +30 VDC
Isolation	:	1000 VDC for DC-to-DC, 2500 Vrms for photo-couple
Montering	:	DIN-Rail
Porte	:	COM 1 RS-232 COM 1 Connector 5-pin screwed terminal block (TxD, RxD, RTS, CTS, GND) COM 2 RS-485 (Self-turner inside) COM 2 Connector 2-pin screwed terminal block (DATA+, DATA-)
RAID niveau	:	CAN, Ethernet, Modbus RTU, Modbus TCP
Stik	:	CANBUS: Connector 2-pin screwed terminal block (CAN_L, CAN_H)
Dimensioner	:	72mm x 122mm x 33mm (W x L x H)

