


19 "SXGA IP66 / IP69K Rostfritt stålpanel PC I3-6100U CPU 32G MLC SSD, projicerad touch FEATURES

19 "TFT-LCD 1280x1024
Projicerad kapacitiv touch.
Intel 6th Core i3-6100U 2,3 GHz (Option I5 3.0 GHz CPU)
max. 16GB RAM DDR4
Sann platt Front Bezel och Klass 304 Rostfritt stålskåp (Option: 316).
IP66 / IP69K rated med M12-kontakt.
Option: RFID
Tryck på strömbrytaren på sidokanten av hygienisk rengöring.
OS Suport: Windows Embedded 7 / 8.1, Windows 10 IOT ENT LTSB
9 ~ 36V DC POWER INPUT



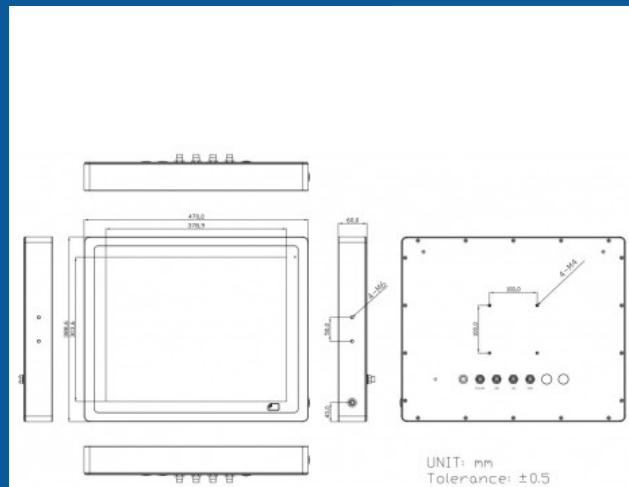

SPECIFICATIONS

USB	:	USB 1 x M12 8-pin for 2 x USB 2.0 with waterproof cover and chain
Driftstemperatur	:	0~50°C
Approval	:	Certification CE / FCC CLASS A
Ethernet	:	10/100/1000MBit LAN 1 x M12 8-pin for LAN with waterproof cover and chain
Hukommelse	:	1 x SO-DIMM DDR4 max. 16GB RAM (no RAM installed)
IP-Tæthed	:	IP rating IP66 / IP69K
Luftfugtighed	:	10 to 90% @ 40°C, non- condensing
Msata	:	1 x Msata onboard
Opløsning	:	Max. resolution 1280 x 1024
Porte	:	Serial 1 x M12 8-pin COM1, RS-232/422/485, default RS-232, with waterproof cover and chain
Strømforbrug	:	30W
Strømforsyning	:	DC 9~36V Power 1 x M12 3-pin for DC power with waterproof cover and chain





Svensk Binär Teknik

IPP19I3

SPECIFICATIONS

Touch	:	Standard Projected Capacitiv Touch Light transmission 80%, (Oprion; resistiv, protection glass)
Vikt	:	9.5Kg
Dimensioner	:	470 x 388.6 x 60 mm



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.