


23,9" Panel PC IP66/IP69K Stängt stålskåp med M12-anslutning, I3 eller I5 CPU, VESA, Okmontering, RS232/422/485,

FEATURES

23,9" rostfritt stål panel PC
8:e generationens Core i5-8365UE 1,6 GHz, eller Core i3-8145UE 2,2 Ghz
1 x 260 SO-DIMM DDR4 2400MHz max. 32 GB RAM
TPM 2.0
1 x M12 Ethernet
1 x M12 RS232/422/485 standard 232
1 x M12 USB 2.0
1 x 2½" SATA3 SSD (tillval)
1 x M.2 ;M-nyckel (PCIe x4/SATA3 Auto detektering), Stöd 2242 standard
RFID mpdul design för fron som OPT. (måste beställas)
1 x Mini PCIe för 4G/5G. Wifi/BT
1 x Nano sim-uttag
lätt att rengöra Design
Kapsling av rostfritt stål av klass 304 (Alternativ 316 kan specialbeställas)
IP66/IP69K IP
M12 kontakter
Standard 250 nits, (hög ljusstyrka på begäran 1000 nits)
Upplösning 1920 x 1080
Kan beställas med Resistive Touch, Projected Capacitive Touch och Glass (anges vid beställning)
Tryck på på/av-knappen på sidokanten för hygienisk rengöring
Specialbeställning kan vara med 2 x M12 reservdelar för (2 x USB2.0 eller 1 x USB 3.0 eller 1 x LAN eller 1 x COM)
Vesamount
YOKE-Mount som tillval.
DC 9~36VDC
OS-stöd: WIN 10 / WIN 11



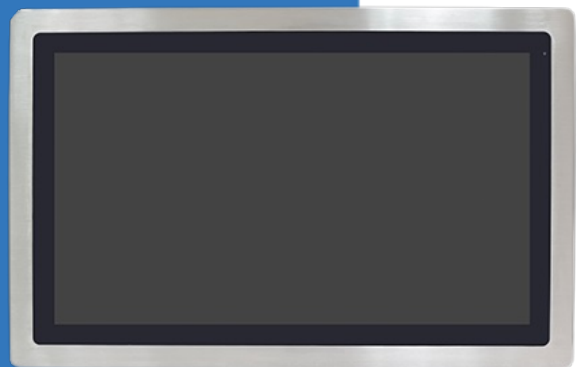

SPECIFICATIONS

USB	:	M12 8-pin for USB 2.0 with waterproof cover and chain
Driftstemperatur	:	0~50°C
Hukommelse	:	260-pin SO-DIMM up to 16GB DDR4 2133MHz
Input	:	M12 3-pin for DC power with waterproof cover and chain
Lysstyrke	:	250(1000 option)
Montering	:	VESA mount 200 x 100, Yoke mount for optional
Netværk	:	M12 8-pin for LAN with waterproof cover and chain
Opløsning	:	1920 x 1080
Porte	:	M12 8-pin COM1, RS-232/422/485, default RS-232, with waterproof cover and chain
Skærm	:	23.8"
Touch	:	Projected capacitive touch, touch on/off button at the side
Dimensioner	:	656 x 423 x 53 mm

