



21,5" panel PC ATEX/IECEX Zone2, Zone22 och C1D2/C2D2/C3 Certified Intel N2930

FEATURES

21,5" TFT-LCD

Intel Celeron-processor N2930

8GB DDR3L ombord

1 x 128 GB 2,5" MLC SSD monterad

1 x 64 GB mSATA MLC SSD monterad

316 chassi i rostfritt stål

Total IP66-klass med M12 vattentät kontakt

En mängd olika IO-applikationer


Brett område DC 9~36V Power Input

Stödpanelfäste & VESA-fäste

Stöd för projicerad kapacitiv beröring

Full platt ram och fläktlös design

ATEX/IECEX Zone2, Zone22 och C1D2/C2D2/C3 certifierade

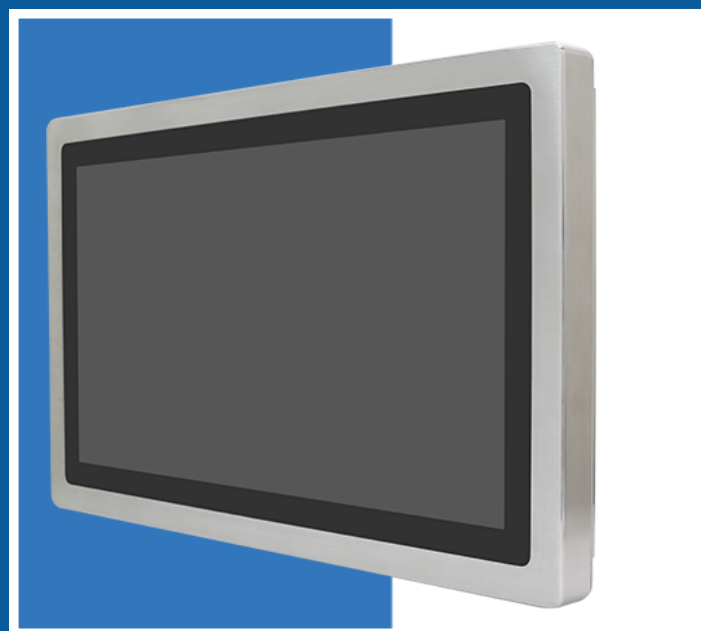



IPP21.5-EX

SPECIFICATIONS

CPU	:	Intel Celeron N2930 Processor (2M Cache, 1.83GHz)
Chipset	:	soc
USB	:	1 x M12 8-pin for 2 x USB 2.0 with waterproof cover and chain
Driftstemperatur	:	-20~60°C
Antal farver	:	16.7 M
Ethernet	:	1 x M12 8-pin for LAN with waterproof cover and chain
Forsyning	:	DC 9~36V, 1 x M12 3-pin for DC power connector with waterproof cover and chain
Hukommelse	:	Onboard 4GB/8GB DDR3L 1333MHz
IP-Tæthed	:	IP66 total
Kontrast	:	3000:1
LCD	:	21.5"
Luftfugtighed	:	10 to 95% @ 40C, non-condensing





SPECIFICATIONS

Montering	:	Vesa mount, OPTION!: Panel mount
Msata	:	1 x mSATA
Mål og vægt	:	12.6Kg
OS SUPPORT	:	Windows embedded 7 Windows embedded 8.1 Windows 10 IoT ENT LTSC
Porte	:	1 x M12 8-pin for COM1, RS232/422/485, Default RS232, with waterproff cover and chain
Skærm	:	1920 x 1080
Strømforbrug	:	35 Watt
Touch	:	Projected Capacitive Touch, USB, Light transmission 90%
Udgange	:	1xM12 8-pin for VGA with waterproff cover and chain
VESA standard	:	Vesa mount 100x100
Dimensioner	:	571x362x75.1mm

