




Svensk Binär Teknik

MON21.5-T-ATEX

21,5" monitor, ATEX Zone2/22 godkänd, Projected
Capacitive Touch, VGA, USB

FEATURES

- 21,5" TFT-LCD
- 1920 x 1080 upplösning
- Projicerad kapacitiv touch via USB
- VGA-videoutgång
- Total IP66-klass med M12 vattentät kontakt
- Strömingång 9-36VDC
- Panelfäste & VESA-fäste
- 316 Stainless Steel
- ATEX/IECEX Zone2, Zone22 och C1D2/C2D2/C3 certifierade

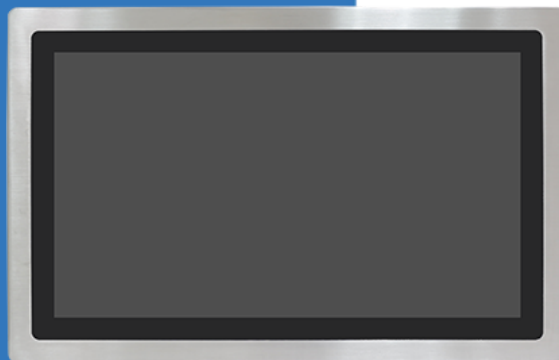

Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.



SPECIFICATIONS

USB	:	1 x M12 8-pin for 2 x USB 2.0 for Touch Control with waterproof cover and chain
Driftstemperatur	:	-20~60°C
Forsyning	:	DC 9~36V, 1 x M12 3-pin for DC power connector with waterproof cover and chain
Lysstyrke	:	ca. 300 cd/m ²
Opløsning	:	1920 x 1080
OSD	:	1 x M12 8-pin for OSD Cable & External OSD BOX with waterproof cover and chain
Touch	:	Projected capacitive touch
Vikt	:	12.3 kg
Dimensioner	:	571 x 362 x 75.1 mm
Certification	:	ATEX / IECEx Zone2 / Zone22

