


BK1700-680E

ATX moderkort, 12:e gen. Intel, Ethernet 2 x 10GbE,
2 x 2,5GbE, 18x USB, QUAD-skärmstöd VGA, 2 x DP,
HDMI, 6x COM

FEATURES

12:e generationens Intel® Core-processorer Socket 1700
4 DDR4 UDIMM upp till 128 GB
Stöd för fyra skärmar: VGA, 2 x DP++, HDMI
Stöder 4K-upplösning
Flera expansioner: 1 PCIe x16 (Gen 5), 4 PCIe x4 (Gen 4), 2 PCI,
2 x M.2 M nyckel,
1 x M.2 E Key
Ethernet 2 x Intel 10GbE, 2 x Intel 2.5GbE
6 x USB 3.2 Gen2
4 x USB 3.2 Gen1
8 x USB 2.0
2 x RS-232/422/485 (RS-232 med effekt) (2,54 mm stigning)
4 x RS-232 (2,54 mm stigning)
Stöder vanligtvis 10-årig CPU-livscykel fram till Q1'32 (Baserat på Intel IOTG Roadmap)
OS-stöd: Windows IoT 10 Enterprise 64-bitars, WIN 10, Linux

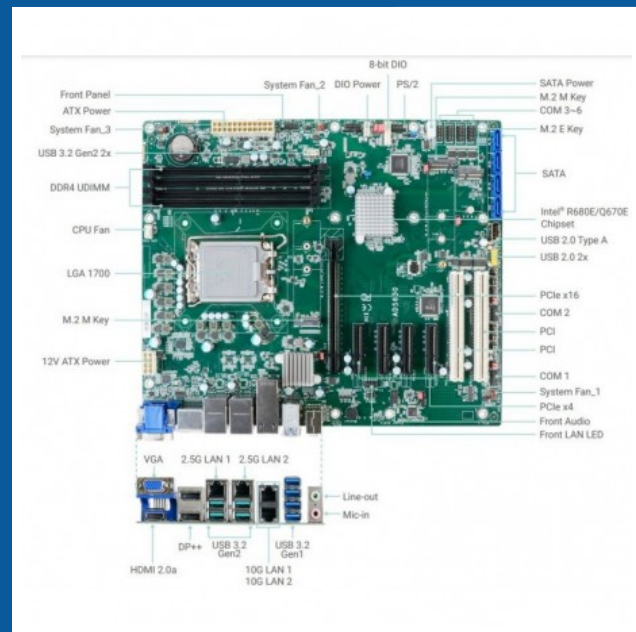



BK1700-680E

SPECIFICATIONS

CPU	:	Celeron; Pentium; i3; i5; i7;i9
Chipset	:	Intel R680E
Digital I/O	:	1 x 8-bit DIO
USB	:	8
Driftstemperatur	:	Operating: -5 to 65°C
BIOS	:	AMI SPI 256Mbit
Approval	:	CE, FCC Class B, UKCA, RoHS
Ethernet	:	4
Grafik	:	Intel® HD Gen 9 Graphics
Lyd	:	Realtek ALC888
OS SUPPORT	:	Windows 10 IoT Enterprise 64-bit Windows Server 2022 Linux
Stik	:	1 x PS/2 (2.54mm pitch)





Svensk Binär Teknik

BK1700-680E

SPECIFICATIONS

Watchdog	:	System Reset, Programmable via Software from 1 to 255 Seconds
Form Factor	:	ATX
RAM	:	128GB



Binär Teknik AB
Lugna Gaten 39 Malmö, 211 59 Sweden



042 14 10 85



salg@danbit.dk

For business customers only (B2B). Prices exclude VAT. We reserve the right to correct errors and make changes.